

CONNECTORS & SWIVELS



QUICK CONNECT PLUGS AND SOCKETS



- (A) ZINC PLATED PLUGS
NOTE: STAINLESS STEEL AVAILABLE UPON REQUEST
- (B) BRASS SOCKETS WITH BUNA-N O-RING

Q.C. SOCKETS	
PART NO.	THREAD SIZE
209031	1/4 MNPT
209032	1/4 FNPT
209033	3/8 MNPT
209034	3/8 FNPT

Q.C. PLUGS	
PART NO.	THREAD SIZE
209023	1/4 FNPT
209024	1/4 MNPT
209025	3/8 FNPT
209026	3/8 MNPT

O-RINGS FOR SOCKETS	
209079	1/4
209089	3/8

ST40 SCREW COUPLINGS



- USED WITH ST41 SCREW NIPPLES
- MAXIMUM 5800 PSI OPERATING PRESSURE
- MAXIMUM 300 °F TEMPERATURE RATING

PART NO.	THREAD SIZE
201597	1/4 MNPT
202194	1/4 FNPT
200785	3/8 MNPT
200784	3/8 FNPT

ST44 SWIVEL COUPLINGS



- MAXIMUM 5.2 GAL/MIN FLOW RATE
- MAXIMUM 5800 PSI OPERATING PRESSURE
- MAXIMUM 300 °F TEMPERATURE RATING

PART NO.	THREAD SIZE
206537	1/4 MNPT
206538	3/8 FNPT

ST41 SCREW NIPPLES



- USED WITH ST40 SCREW COUPLINGS
- MAXIMUM 5800 PSI OPERATING PRESSURE
- MAXIMUM 300 °F TEMPERATURE RATING

PART NO.	THREAD SIZE
200787	1/4 FNPT
200789	1/4 MNPT
200811	3/8 FNPT
20788	3/8 MNPT

HIGH PRESSURE SWIVELS




- MAXIMUM 5.2 GAL/MIN FLOW RATE
- MAXIMUM OPERATING PRESSURE: 209085 - 3000 PSI
209121 - 5000 PSI
- MAXIMUM 300 °F TEMPERATURE RATING

PART NO.	THREAD SIZE
209085	3/8 M X 3/8 F
209121	3/8 M X 3/8 F

BALL VALVES / BALL VALVE ASSEMBLIES




2 WAY BALL VALVES



- BRASS, CARBON STEEL OR STAINLESS STEEL CONSTRUCTION
- UP TO 6000 PSI RATED - HIGHER PRESSURE VALVES AVAILABLE UPON REQUEST

HIGH PRESSURE RATED

CLS / CLS-3 CLEANING STATION ASSEMBLY



PART NO.	MATERIAL		THREAD SIZE-IN.	MAX. PRESS.	MAX. TEMP.	LOCKABLE
	BODY	BALL				
200743	CARBON STEEL	STAINLESS	1/4 F X 1/4 F	2000 PSI	110 °F	NO
400246	STAINLESS	STAINLESS	3/8 F X 3/8 F	2000 PSI	180 °F	YES
220009	STAINLESS	STAINLESS	3/8 F X 3/8 F	6000 PSI	250 °F	NO
200742	CARBON STEEL	STAINLESS	1/2 F X 1/2 F	2000 PSI	110 °F	NO
400247	STAINLESS	STAINLESS	1/2 F X 1/2 F	2000 PSI	180 °F	YES
206535	STAINLESS	STAINLESS	1/2 F X 1/2 F	6000 PSI	250 °F	NO
CLS	STAINLESS	STAINLESS	3/8 F X 3/8 F	2000 PSI	250 °F	NO
CLS-3	STAINLESS	STAINLESS	1/2 F X 1/2 F	6000 PSI	250 °F	NO

BALL VALVES / BALL VALVE ASSEMBLIES



LOW PRESSURE RATED


PART NO.	MATERIAL		THREAD SIZE-IN.	MAX. PRESS.	MAX. TEMP.	LOCKABLE
	BODY	BALL				
201465	BRASS	NICKEL PLATED	1/4 F X 1/4 F	250 PSI	180 °F	NO
400399	BRASS	NICKEL PLATED	3/4 F X 3/4 F	150 PSI	250 °F	NO
400915	BRASS	STAINLESS	3/4 F X 3/4 F	600 PSI	260 °F	YES
DBV2103-F	BRASS	NICKEL PLATED	1 F X 1 F	150 PSI	250 °F	NO
202456	BRASS	STAINLESS	1 F X 1 F	600 PSI	260 °F	YES
DBV2103-J	BRASS	NICKEL PLATED	1-1/4 F X 1-1/4 F	150 PSI	250 °F	NO
DBV2103-H	BRASS	NICKEL PLATED	1-1/2 F X 1-1/2 F	150 PSI	250 °F	NO

PRESSURE REGULATORS AND UNLOADERS



TRAPPED PRESSURE UNLOADER VALVES

• REMOVE CHECK VALVE FOR USE AS A PRESSURE REGULATOR •

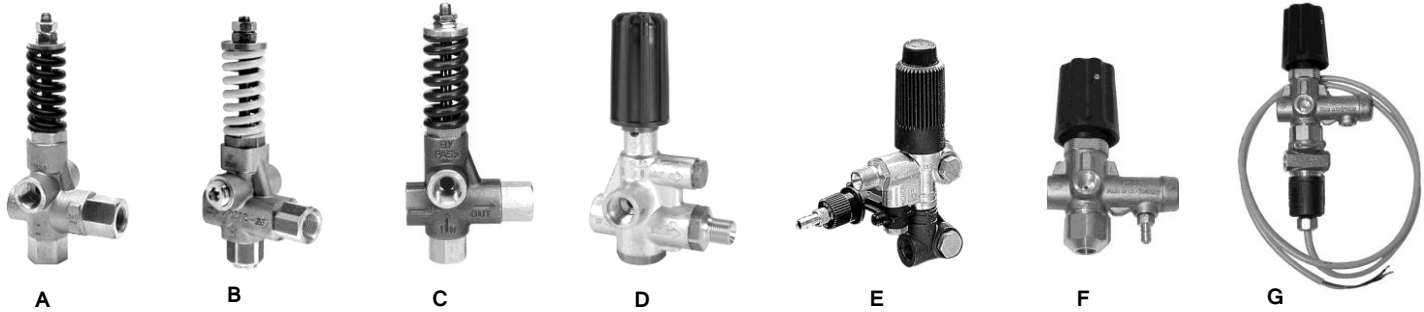

PART NO. (ITEM)	SPRING COLOUR	MAXIMUM FLOW	RATED PRESSURE	MAXIMUM PRESSURE	INLET	OUTLET	BY-PASS	MAXIMUM TEMP.
220323 (A)	BLUE	7.8 GPM	3600 PSI	4000 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	195°F
220756(A)	WHITE	7.8 GPM	1450 PSI	1750 PSI	(2) 3/8 IN. NPTF	3/8 IN. NPTF	(2) 3/8 IN. NPTF	195°F
240158 (B)	GREEN	21.0 GPM	4050 PSI	4350 PSI	(2) 1/2 IN. NPTF	1/2 IN. NPTF	(2) 1/2 IN. NPTF	200°F
220721 (B)	WHITE	21.0 GPM	2175 PSI	2450 PSI	(2) 1/2 IN. NPTF	1/2 IN. NPTF	(2) 1/2 IN. NPTF	200°F
220296 (C)	BLACK	21.0 GPM	5800 PSI	6500 PSI	(2) 1/2 IN. NPTF	1/2 IN. NPTF	(2) 1/2 IN. NPTF	200°F
220031(D)	BLUE	21.0 GPM	3000 PSI	3000 PSI	3/8 IN. BSPF	1/4 IN. BSPF & 3/8 IN. BSPF	(2) 3/8 IN. BSPF	200°F
PART NO.	INJECTOR	MAXIMUM FLOW	RATED PRESSURE	MAXIMUM PRESSURE	INLET	OUTLET	BY-PASS	MAXIMUM TEMP.
200799 (F)	1.8	8.0 GPM	3600 PSI	3600 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	176°F
200800 (F)	2.1	8.0 GPM	3600 PSI	3600 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	176°F
200801 (F)	2.4	8.0 GPM	3600 PSI	3600 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	176°F
200802 (G)	-	8.0 GPM	3600 PSI	3600 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	176°F
202661 (F)	-	8.0 GPM	3600 PSI	3600 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	176°F
202662 (G)	2.1	8.0 GPM	3600 PSI	3600 PSI	3/8 IN. NPTF	3/8 IN. NPTF	3/8 IN. NPTF	176°F

PRESSURE REGULATOR AND UNLOADER VALVE REPAIR KITS

REPAIR KIT NO.	PART NO. (ITEM)	REPAIR KIT NO.	PART NO.	REPAIR KIT NO.
401383	200799 (F)	206561	240197	240203
401383	200800 (F)	206561	240198	240203
220325	200801 (F)	206561	240199	240203
220325	200802 (G)	206562	240200	240204
206310	202661 (F)	206562	240095	401221
240115	202662 (G)	206562	209016	209095
201357/220096	240196	240203	-	-