


HIGH PRESSURE PLUNGER PUMPS-GENERAL




(Contact us if your pump is not listed here)




T9051EBF or T9051BA

FLOW _____ 2.11 GPM
 MAXIMUM PRESSURE _____ 1500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1750 RPM
 BORE _____ 0.591"
 STROKE _____ 0.370"
 CRANKCASE CAPACITY _____ 11.2 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/8" NPTF
 DISCHARGE PORTS (2) _____ 1/4" NPTF



TT9061EBF or TT9061BA

FLOW _____ 2.11 GPM
 MAXIMUM PRESSURE _____ 1500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 3400 RPM
 BORE _____ 0.591"
 STROKE _____ 0.197"
 CRANKCASE CAPACITY _____ 11.2 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/8" NPTF
 DISCHARGE PORTS (2) _____ 1/4" NPTF



TT9071EBF or TT9071BA

FLOW _____ 2.8 GPM
 MAXIMUM PRESSURE _____ 1500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 3400 RPM
 BORE _____ 0.591"
 STROKE _____ 0.260"
 CRANKCASE CAPACITY _____ 11.2 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/8" NPTF
 DISCHARGE PORTS (2) _____ 1/4" NPTF



T9951 or T9951B

FLOW _____ 3.5 GPM
 MAXIMUM PRESSURE _____ 1500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1750 RPM
 BORE _____ 0.787"
 STROKE _____ 0.335"
 CRANKCASE CAPACITY _____ 15.2 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF




TT2035GBF

FLOW _____ 3.5 GPM
 MAXIMUM PRESSURE _____ 2000 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 3400 RPM
 BORE _____ 0.591"
 STROKE _____ 0.315"
 CRANKCASE CAPACITY _____ 11.2 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/8" NPTF
 DISCHARGE PORTS (2) _____ 1/4" NPTF



T991

FLOW _____ 3.5 GPM
 MAXIMUM PRESSURE _____ 1500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1450 RPM
 BORE _____ 0.787"
 STROKE _____ 0.394"
 CRANKCASE CAPACITY _____ 15.2 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF



EZ2542E or W959BH

FLOW _____ 4.2 GPM
 MAXIMUM PRESSURE _____ 2500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1750 RPM
 BORE _____ 0.708"
 STROKE _____ 0.512"
 CRANKCASE CAPACITY _____ 14.0 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF



EZ3040G or WW961BC

FLOW _____ 4.0 GPM
 MAXIMUM PRESSURE _____ 3000 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 3400 RPM
 BORE _____ 0.591"
 STROKE _____ 0.374"
 CRANKCASE CAPACITY _____ 14.0 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF



TS1011

FLOW _____ 4 GPM
 MAXIMUM PRESSURE _____ 2000 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1450 RPM
 BORE _____ 0.787"
 STROKE _____ 0.472"
 CRANKCASE CAPACITY _____ 33.8 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF



TS2011

FLOW _____ 4 GPM
 MAXIMUM PRESSURE _____ 3500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1450 RPM
 BORE _____ 0.787"
 STROKE _____ 0.472"
 CRANKCASE CAPACITY _____ 40.6 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF




T1321 or T1321B

FLOW _____ 5.5 GPM
 MAXIMUM PRESSURE _____ 2100 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1150 RPM
 BORE _____ 0.866"
 STROKE _____ 0.630"
 CRANKCASE CAPACITY _____ 40.6 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/4" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF




T9211 or T9211B

FLOW _____ 4 GPM
 MAXIMUM PRESSURE _____ 3000 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1750 RPM
 BORE _____ 0.787"
 STROKE _____ 0.394"
 CRANKCASE CAPACITY _____ 40.6 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF




TS2021 or TS2021BN

FLOW _____ 5.6 GPM
 MAXIMUM PRESSURE _____ 3500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1450 RPM
 BORE _____ 0.866"
 STROKE _____ 0.630"
 CRANKCASE CAPACITY _____ 40.6 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF

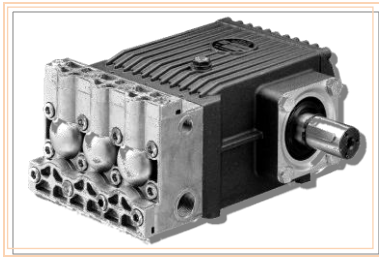


TS1041 or TS1041B

FLOW _____ 8 GPM
 MAXIMUM PRESSURE _____ 1600 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1450 RPM
 BORE _____ 0.787"
 STROKE _____ 0.630"
 CRANKCASE CAPACITY _____ 50.7 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/4" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF

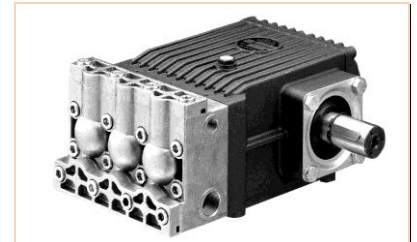

TS1531

FLOW _____ 7.92 GPM
 MAXIMUM PRESSURE _____ 2175 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1450 RPM
 BORE _____ 0.787"
 STROKE _____ 0.866"
 CRANKCASE CAPACITY _____ 50.7 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 3/4" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF

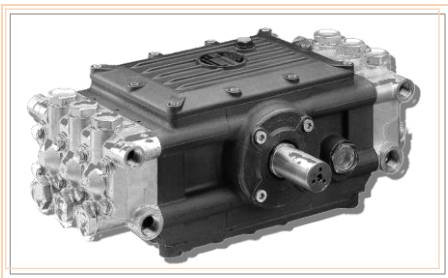


T1631

FLOW _____ 10 GPM
 MAXIMUM PRESSURE _____ 2500 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1080 RPM
 BORE _____ 0.866"
 STROKE _____ 0.630"
 CRANKCASE CAPACITY _____ 54 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (4) _____ 3/4" NPTF
 DISCHARGE PORTS (4) _____ 3/8" NPTF



T2031

FLOW _____ 9 GPM
 MAXIMUM PRESSURE _____ 3000 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1140 RPM
 BORE _____ 0.787"
 STROKE _____ 0.630"
 CRANKCASE CAPACITY _____ 54 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (4) _____ 3/4" NPTF
 DISCHARGE PORTS (4) _____ 3/8" NPTF

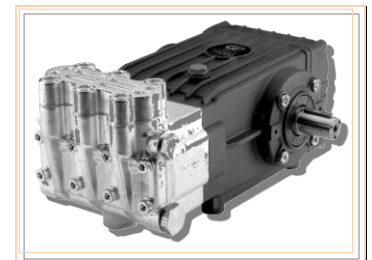

T5050

FLOW _____ 5 GPM
 MAXIMUM PRESSURE _____ 5000 PSI
 INLET PRESSURE _____ FLOODED TO 70 PSI
 RPM _____ 1845 RPM
 BORE _____ 0.630"
 STROKE _____ 0.748"
 CRANKCASE CAPACITY _____ 40.6 OZ.
 MAX. LIQUID TEMPERATURE _____ 165°F
 INLET PORTS (2) _____ 1/2" NPTF
 DISCHARGE PORTS (2) _____ 3/8" NPTF